


# Package Outline

## HEXFET SOT-223 (TO-261AA) Outline

### LEAD ASSIGNMENTS


- 1 - GATE
- 2 - DRAIN
- 3 - SOURCE
- 4 - DRAIN

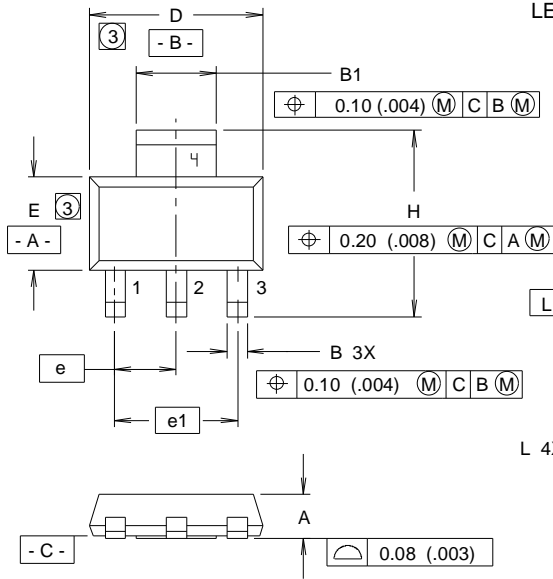

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.55	1.80	.061	.071
B	0.65	0.85	.026	.033
B1	2.95	3.15	.116	.124
C	0.25	0.35	.010	.014
D	6.30	6.70	.248	.264
E	3.30	3.70	.130	.146
e	2.30 BSC		.0905 BSC	
e1	4.60 BSC		.181 BSC	
H	6.71	7.29	.287	.264
L	0.91	—	.036	—
L1	0.061 BSC		.0024 BSC	
$\theta$	—	10°	—	10°


# Tape & Reel Information

## HEXFET SOT-223 Outline

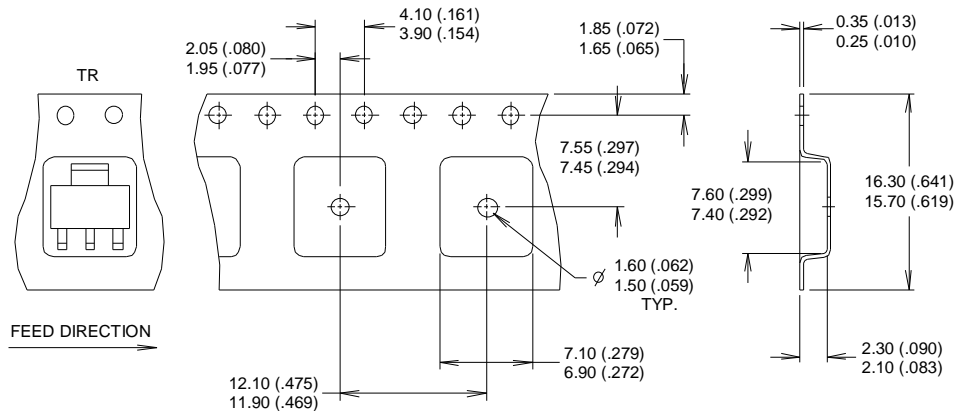

### NOTES :

1. CONTROLLING DIMENSION: MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.
3. EACH  $\varnothing 330.00$  (13.00) REEL CONTAINS 2,500 DEVICES.

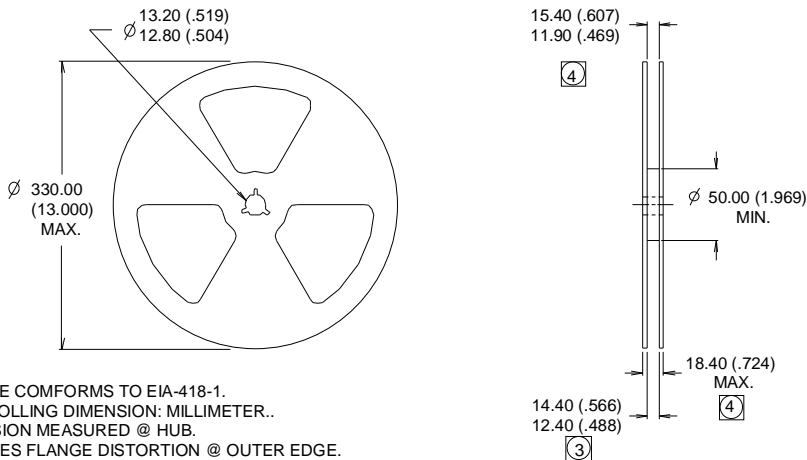

### NOTES :

1. OUTLINE COMFORMS TO EIA-418-1.
2. CONTROLLING DIMENSION: MILLIMETER..
- ③ DIMENSION MEASURED @ HUB.
- ④ INCLUDES FLANGE DISTORTION @ OUTER EDGE.

# Part Marking Information

## HEXFET SOT-223

EXAMPLE : THIS IS AN IRFL014

